



Shower-Ware® 410ADAWH-A Series

Apex Type 1, Flush-Mounted Showers - ADA Compliant - Wide Housing



412-ADA-WH-A-W

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Apex Type 1, Flush-Mounted Showers - ADA Compliant - Wide Housing

Shower includes an ADA compliant control valve with lever handle or pushbutton, a fixed upper shower head, a lever handle diverter valve, a quick disconnect hand shower with vacuum breaker and flow control, valve supply flexible hose connectors, a recessed soap dish, a two-wall stainless steel grab bar, a 1103 series padded vinyl folding seat and a curtain with headrail for a 36" opening. Unit conforms with ANSI, UFAS and ADA requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

Shower Panel is 14 gage, type 304 stainless steel with satin finish.

Reach. All controls, soap dish, etc., must be 38" to 48" from the finished floor to be within reach of a seated bather with limited arm movement.

Shower Heads. A shower head on a five foot hose (hand shower) is provided for seated bathers. A conventional fixed shower head is also provided at 6'-0" discharge height. Shower head is solid brass, triple chrome-plated and includes a built-in 2.5 GPM flow restrictor. The Acorn Logan Wizard Shower Head design provides self-cleaning with every use, and has an adjustable spray pattern from coarse stream to a fine mist.

Valves. Disabled bathers should be provided with protection against sudden hot or cold "shock". Pressure balancing valves such as our Safti-Trol® are often required and are strongly recommended. Indicate valve by selection of appropriate Shower-Ware® figure numbers.

Seat and Privacy Compartments. Disabled bathers understandably should be given privacy while bathing. In addition, there is the requirement to provide a seat opposite the controls. This suggests constructing an alcove, partial wall or providing a reinforced privacy panel for mounting the seat (suffix option -RP).

Fasteners. Acorn furnishes all exposed tamper-resistant fasteners necessary to complete the on-site shower assembly; however, concealed wall fasteners or anchor shields are not furnished.

GUIDE SPECIFICATION

Provide and install Acorn Apex Flush-Mounted, ADA Compliant Wall Shower with Wide Housing (specify model number and options). Shower panel shall be fabricated from 14 gage, type 304 stainless steel and shall have a satin finish. Exposed trim shall be chrome-plated brass. Fixture shall be furnished with an ADA compliant control valve with lever handle or pushbutton, a fixed upper shower head, a lever handle diverter valve, a quick disconnect hand shower with vacuum breaker and flow control, valve supply flexible hose connectors, a recessed soap dish, a two-wall stainless steel grab bar, a 1103 series padded vinyl folding seat and a curtain and headrail for a 36" opening. Units to conform with ANSI, UFAS and ADA requirements for accessibility. Shower shall be provided with the following optional equipment: (example -Y Universal Ball Joint). Installation shall be made in accordance with manufacturer's recommendations and details.

Shower-Ware® 410ADAWH-A: Apex Type 1, Flush-Mounted Showers - ADA Compliant - Wide Housing



MODEL NUMBER AND OPTIONS SELECTION

SERIES (Must Specify)

- 4 Apex

TYPE (Must Specify)

- 1 Flush-Mounted ADA Showers with Wide Housing

VALVE SELECTION (Must Specify)

- 0-ADA-WH-A Electronic Valves, Single Temp. Metering
- 2-ADA-WH-A Safti-Trol, H & C Pressure Balancing
- 3-ADA-WH-A Safti-Therm, H & C Temperature Balancing
- 4-ADA-WH-A Single-Trol, H & C Mixing
- 5-ADA-WH-A Flo-Cloz, Single Temperature
- 6-ADA-WH-A Air-Control, Single Temperature Metering

Valve Orientation (Must Specify) ___ Left ___ Right

ELECTRONIC VALVE SELECTION

(Refer to Valves Section for Submittal Data)

- EVS1 Electronic Valve System - Single Temperature
- MVC1 Time-Trol - Single Temperature


SUPPLY (Must Specify)

- W Wall

Product Options

- BAT Battery Operated (-MVC1)
- BS Built-in Liquid Soap Dispenser
- CI Cycle Interrupt
- CSH Conical Showerhead
- D Surface-Mounted Soap Dish
- EG Enviro-Glaze Color, Specify: _____
- F Flow Control 2.0 GPM
- FH Fixed Head at 48" in Lieu of Hand Shower
- FSS Stainless Steel Folding Seat in Lieu of Padded
- G Individual Stops
- GX Individual Check Stops
- H Hand Volume Control
- K Allen Key Volume Control
- LCH Less Curtain with Headrail
- LFS Less Padded Folding Seat
- LGD Less Grab Bar
- LRD Less Recessed Soap Dish
- MS Modular Privacy Compartments (See Diana Privacy Tab)
- MSH Multi-Stream Shower Head
- P Penal Shower Head
- PBH Hemispherical Pushbutton
- PO Piston-Operated Safti-Trol Valve
- RP Reinforced Panel for Folding Seat with Curtain
- SB 24" Slide Bar (Panel Mounted)
- TF Transformer
- WS Without Showerhead
- Y Universal Ball Joint
- YY Lockable Universal Ball Joint
- Z Up-Down Ball Joint
- ZZ Lockable Up-Down Ball Joint

Please visit www.acorneng.com for most current specifications.

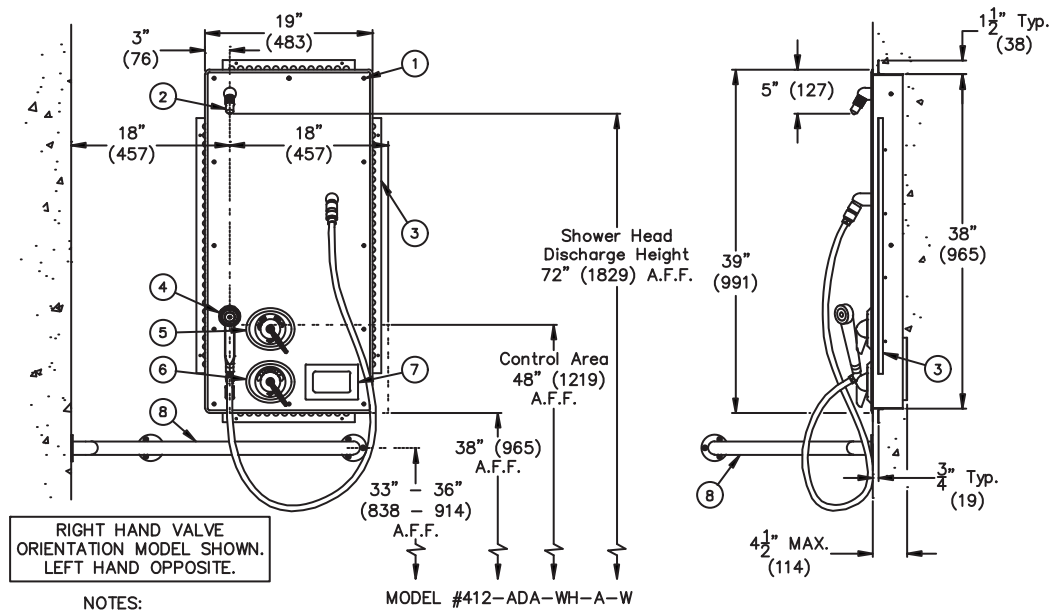

RIGHT HAND VALVE ORIENTATION MODEL SHOWN. LEFT HAND OPPOSITE.

- NOTES:
1. Tamper Resistant Fasteners.
 2. Fixed Upper Shower Head.
 3. Wall Mounting Frame with Plaster Flanges.
 4. Hand Shower with QD & 60" Flex Hose.
 5. Diverter Valve with Lever Handle.
 6. Control Valve.
 7. Recessed Soap Dish.
 8. Two-Wall Grab Bar.

Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2008 Acorn Engineering Company

<p>Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>
---	---