



## Shower-Ware® 480 Series

Eco-Rain Apex Type 8 Surface-Mounted Showers



482-W

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Eco-Rain Apex Type 8 Surface-Mounted Showers

**Housing** is 18 gage, type 304 stainless steel with satin finish.

**Control Valve** type is indicated by selected Apex model number. Safti-Trol® Hot & Cold Pressure Balancing valve has a replaceable cartridge which contains all wearing parts and comes standard with checkstops. Safti-Trol® valve is tamper-resistant with an easy close mechanism. Air-Control Single Temperature valve is a pneumatically operated, pushbutton valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds to activate. Air-Control valve is metering type with non-hold open feature having adjustable timing from 5 to 60 seconds.

**Shower Head** is solid brass, chrome-plated and includes built-in 2.5 GPM flow restrictor. The Acorn Logan Wizard Shower Head design provides self-cleaning with every use, and has an adjustable spray pattern from a coarse stream to a fine mist.

**Fasteners.** Acorn furnishes all exposed tamper-resistant fasteners necessary to complete the on-site shower assembly; however, concealed wall fasteners or anchor shields are not furnished.

**Regularly furnished** items include a Rigid Shower Head, Flexible Supply Connectors and a Recessed Soap Dish.

#### GUIDE SPECIFICATION

Provide and install Acorn Eco-Rain Apex Surface-Mounted Showers (specify model number and options). Housing shall be 18 gage, type 304 stainless steel with satin finish. Fixture shall be supplied with a recessed soap dish. Shower head shall be Acorn Logan Wizard with adjustable spray from a coarse stream to a fine mist. Shower shall be provided with the following optional equipment: (example -P Penal Shower Head). Installation shall be made in accordance with manufacturer's recommendations and details.

# Shower-Ware®: 480 Econ-Rain Apex Type 8 Surface-Mounted Showers



## MODEL NUMBER AND OPTIONS SELECTION

### SERIES (Must Specify)

-4 Apex

### TYPE (Must Specify)

-8 Eco-Rain Surface-Mounted Showers

### VALVE (Must Specify)

-2 Safti-Trol, H & C Pressure Balancing

-6 Air-Control, Single Temperature Metering

### SUPPLY (Must Specify)

-W Wall

### Product Options

-G Individual Stops


-GX Individual Check stops

-MSH Multi-Stream Shower Head

-P Penal Shower Head

-Y Universal Ball Joint

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

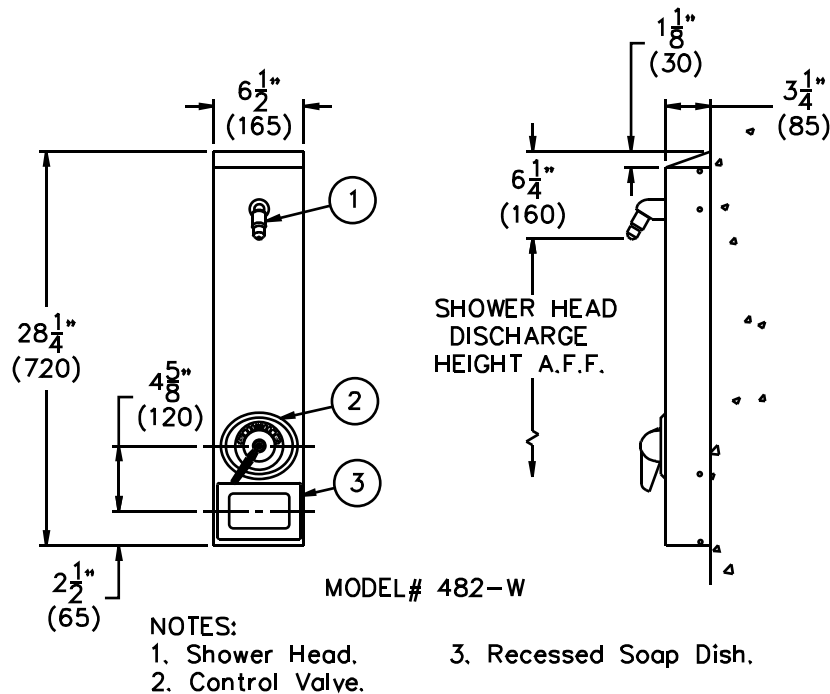

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2004 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>